

Option:

"BZ7E/BZ8E: Electric leg rest"


For some wheelchairs there is the possibility to have electric leg rests.

For the instructions of the wheelchair refer to the instruction manual of the wheelchair.

1. Technical Specifications

Description	Dimensions
Weight	8,56 kg/pair
Length adjustment	185 mm
Depth adjustment	25 mm/side
Angle adjustment	10° - 95°

2. Components



3. Safety rules

Make sure that all screws are firmly secured before driving with your electric wheelchair.

4. Manner of delivery

The electric leg rest shall be delivered with:


- Footplate
- Leg rest cushions
- Instruction manual

Before use check if everything is included and that no products are damaged (example by transport, ...).

5. <u>Tools</u> Allen key set n° 4, 5 Wrench set n° 10

6. Mounting / removing leg rest

▲ WARNING: Risk of injury - Make sure that the leg rests are firmly locked before using the leg rests.



The mounting of the leg rests is done as follows:

- 1. Mount the jack male ⁽²⁾ in the wheelchair attachment tube ⁽³⁾.
- 2. Check that the leg rest is firmly secured.

To take off the leg rests:

- 1. Push on lever ①.
- 2. Pull the leg rest upwards out the wheelchair attachment ③.


7. Angle of leg rest

▲ WARNING: Risk of injury - Make sure that no objects and/or persons are inside the swinging range of the adjust functions.

The angle of the leg rest you can adjust with your operator control (range 85°: step less).

8. Length leg rest

- ▲ WARNING: Make sure that the leg rest is firmly secured.
- ▲ CAUTION: Avoid that the leg rests make any contact with the ground. Keep a minimum distance from 60 mm above the ground.




Adjust the length of the leg rests as follow: 1. Loosen the screw and nut ① a little bit (on the back of the leg rest).

- 2. Adjust the length of the leg rest to a comfortable length (range 185 mm: step less).
- 3. Tighten the screw and nut ${\rm \textcircled{O}}$ properly.




Subject to technical alterations - vA - 2015-11

The max adjustable length of the leg rest shall be marked with a triangle on the tube. Not possible when leg rest is in vertical position (safe distance of 60 mm from the ground).




9. Adjusting angle foot plate

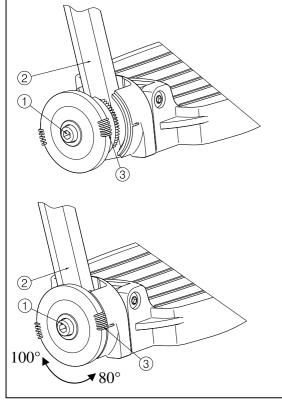

Adjust the angle of the foot plate as follow: 1 + 2 = 2 = 2


- 1. Loosen bolt ①.
- 2. Adjust tube ② in the desired angle. The angle indication (80°-85°-90°-95°-100°) is according the dashes ③.
- 3. Retighten the bolt .

- 10. Adjusting the width of the leg rest
- ▲ WARNING: Risk of injury Make sure that all screws are secure and properly tightened before using the leg rests.
- ▲ WARNING: Risk of injury Make sure that the leg rests are positioned symmetrically from the seat.




Adjust the width of the leg rests as follow:

- Loosen the hexagon socket screw ① just under the seat frame.
- 2. Adjust the leg rest in the desired position.
- 3. Retighten the hexagon socket screw ①.
- 4. Repeat instructions above for the other leg rest.




The maximum position of the seat width is marked with the triangle on the square tube (A). Place the point of the triangle against the square tube (B) of the seat frame.



The minimum position of the seat width is with a safe distance of 10 mm between the square tubes (A) and (B).

11. Fold away leg rest cushion




The leg rest cushion can be easily fold away as follow:

- 1. Take the cushion ① on the outside.
- 2. Fold the cushion ① to the front.



Subject to technical alterations - vA - 2015-11




- 3. Take the cushion ① on the back.
- 4. Swing the cushion ① forwards.

To put the leg rest cushions in the begin position you can do the reverse.

Do not place your fingers between the movable parts or where they can be squeezed.


12. Adjusting height leg rest cushion



- Fold away leg rest cushion (according previous paragraph.
 Loosen bolt 0.0
- 2. Loosen bolt ① on the side of the leg rest.
- 3. Adjust the height of the leg rest to a comfortable position (range 60
- mm: step less). 4. Retighten the bolt ①.

13. Adjusting depth leg rest cushion


- 1. Remove the screw ①.
- Adjust the depth of the leg rest cushion to a comfortable position (7 different positions in steps of 15 mm).
- 3. Retighten the screw ①.

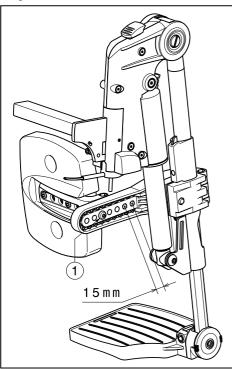

Subject to technical alterations - vA - 2015-11

14. Adjusting width leg rest cushion

- 1. Remove the two bolts ① on the back of the leg rest cushion.
- 2. Adjust the width of the leg rest cushion to a comfortable position (2 different positions in steps of 20 mm, **do not use the middle hole** (2) **for adjusting).**
- 3. Retighten the two bolts ①.

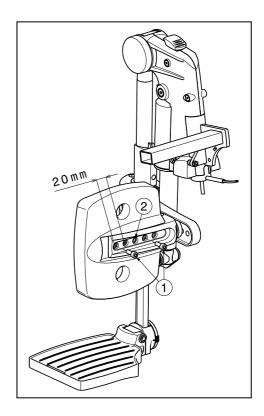



Belgium

N.V. Vermeiren N.V.

Vermeirenplein 1 / 15 B-2920 Kalmthout Tel: +32(0)3 620 20 20 Fax: +32(0)3 666 48 94 website: www.vermeiren.be e-mail: info@vermeiren.be

France

Vermeiren France S.A.

Z. I., 5, Rue d´Ennevelin F-59710 Avelin Tel: +33(0)3 28 55 07 98 Fax: +33(0)3 20 90 28 89 website: www.vermeiren.fr e-mail: info@vermeiren.fr

Italy

Vermeiren Italia

Viale delle Industrie 5 I-20020 Arese MI Tel: +39 02 99 77 07 Fax: +39 02 93 58 56 17 website: www.vermeiren.it e-mail: info@vermeiren.it

Poland

Vermeiren Polska Sp. z o.o

ul. Łączna 1 PL-55-100 Trzebnica Tel: +48(0)71 387 42 00 Fax: +48(0)71 387 05 74 website: www.vermeiren.pl e-mail: info@vermeiren.pl

Czech Republic

Vermeiren ČR S.R.O. Nádražní 132 702 00 Ostrava 1 Tel: +420 596 133 923 Fax: +420 596 121 976 website: www.vermeiren.cz e-mail: info@vermeiren.cz

Germany

Vermeiren Deutschland GmbH

Wahlerstraße 12 a D-40472 Düsseldorf Tel: +49(0)211 94 27 90 Fax: +49(0)211 65 36 00 website: www.vermeiren.de e-mail: info@vermeiren.de

Austria

Vermeiren Austria GmbH Schärdinger Strasse 4 A-4061 Pasching Tel: +43(0)7229 64900 Fax: +43(0)7229 64900-90 website: www.vermeiren.at e-mail: info@vermeiren.at

Switzerland

Vermeiren Suisse S.A.

Hühnerhubelstraße 59 CH-3123 Belp Tel: +41(0)31 818 40 95 Fax: +41(0)31 818 40 98 website: www.vermeiren.ch e-mail: info@vermeiren.ch

Spain / Portugal

Vermeiren Iberica, S.L. Carratera de Cartellà, Km 0,5 Sant Gregori Parc Industrial Edifici A 17150 Sant Gregori (Girona) Tel: +34 972 42 84 33 Fax: +34 972 40 50 54 website: www.vermeiren.es e-mail: info@vermeiren.es